

Street & Parking Light

For bright and powerfull illuminations
of streets and parking areas



Street & Parking Light

PARKING LIGHT FIXTURE | E27 SOCKET

Excluding lamp




Input: E27 Light Bulb (not included)

IP Rate: IP54

IK Rate: IK09

Connection Diameter: Ø 60 mm

Material: PET + Aluminium



ART. NR.	DIAMETER Ø	HEIGHT
220-040	590 mm	459 mm

ART. NR.	ACCESSORIES - CORN LAMPS
175-530	LED Corn Lamp 20W E27 3000K 1800 Lm
175-531	LED Corn Lamp 20W E27 5000K 1900 Lm
175-532	LED Corn Lamp 30W E27 3000K 2800 Lm
175-533	LED Corn Lamp 30W E27 5000K 2880 Lm

LED PARKING LIGHT | 35W | 6500K

Including Philips Xitanium LED driver



Input: 230V

Power: 35 Watt

LED type: CREE XP-E

Beam: 45°

IP Rate: IP65



Connection Diameter: Ø 48 mm

Connection Type: Stripped Wire



ART. NR.	POWER	COLOR TEMP. (CCT)	LIGHT OUTPUT	LED QTY	LENGTH	WIDTH	DEPTH
220-021	35 Watt	6500K	2660 Lm	28	435 mm	245 mm	155 mm

ART. NR.	ACCESSORY
220-022	Mounting converter for mounting on a vertical pole Ø60mm

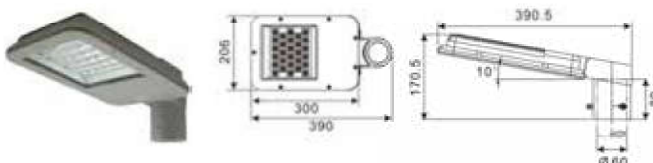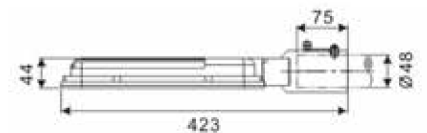

Street & Parking Light

LED STREET LIGHT | 60W - 90W - 120W | 4000K

With Philips LED and Meanwell Driver



Input: 230V
Power: 60/90/120 Watt
LED type: Philips
Beam: 120°
IP Rate: IP65
Connection Diameter: Ø 60 mm
Connection Type: Screw Terminal inside
Housing: Aluminium, Grey



ART. NR.	POWER	COLOR TEMP. (CCT)	LIGHT OUTPUT	LED QTY	LENGTH	WIDTH	DEPTH
220-030	60 Watt	4000K	7200 Lm	60	580 mm	315 mm	70 mm
220-031	90 Watt	4000K	10,800 Lm	90	680 mm	315 mm	70 mm
220-032	120 Watt	4000K	14,400 Lm	120	780 mm	315 mm	70 mm

Steel Mounting / Wall Support 60 mm
 Suitable for all Street Light models
 Art. nr. 220-060

ART. NR. ACCESSORY

220-060 LED Street Light | Mounting / Wall Support 60MM | Steel

LED STREET LIGHT | 106-140W | 4000K

Including Philips Xitanium LED driver



Input: 230V
Power: 106/140 Watt
LED type: CREE XPE HEW
Beam: 45°
IP Rate: IP65
Connection Diameter: Ø 60 mm
Connection Type: Screw Terminal
Housing: Aluminium, Grey




ART. NR.	POWER	COLOR TEMP. (CCT)	LIGHT OUTPUT	LED QTY	LENGTH	WIDTH	DEPTH
220-027	106 Watt	4000K	10,405 Lm	45	696 mm	376 mm	118 mm
220-028	140 Watt	4000K	13,698 Lm	60	763 mm	376 mm	118 mm

Steel Mounting / Wall Support 60 mm
 Suitable for all Street Light models
 Art. nr. 220-060

ART. NR. ACCESSORY

220-060 LED Street & Parking Light | Mounting / Wall Support 60MM | Steel

LED Streetlight 106 Watt

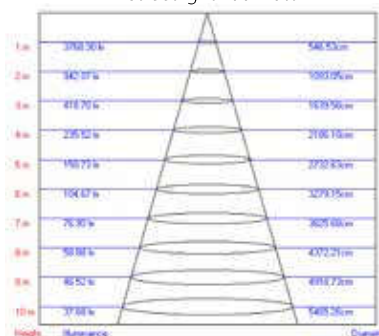

LED Streetlight 140 Watt

